



WATER HOSE

PVC Lay-Flat Water Discharge Hose

Application:

Light and economical lay flat hose which is easy to roll up and pack for storage after use. It is suitable for drip irrigation application and no tearing after punching. Produced in a single process inner and outer tube bounded with high tensile yarn reinforcement.

Temperature:

-5°F/+170°F (-20°C /+76°C)

Marking:

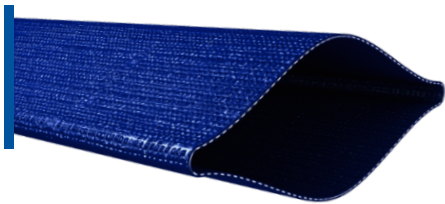
 PARAGON







Tube and Cover:

Durable Polyvinyl Chloride PVC material.

Reinforcement:

High strength polyester yarn spiral wrap.



 PART NO.	 ID		 OD		 Pressure	 Weight		 Max. L
	Inch	mm	Inch	mm	PSI in 60°F	Lbs./Ft	Kg/m	ft/m
BLFW-100-110-300	1	25	1.13	26.5	110	0.11	0.16	300/91
BLFW-125-080-300	1¼	32	1.38	33.1	80	0.13	0.19	300/91
BLFW-150-080-300	1½	40	1.63	39.7	80	0.16	0.24	300/91
BLFW-200-070-300	2	50	2.13	52.9	70	0.23	0.34	300/91
BLFW-250-070-300	2½	65	2.66	66.2	70	0.29	0.43	300/91
BLFW-300-065-300	3	75	3.16	79.4	65	0.39	0.58	300/91
BLFW-400-060-300	4	100	4.17	105.8	60	0.52	0.77	300/91
BLFW-500-060-300	5	125	5.17	132.2	60	0.68	1.01	300/91
BLFW-600-060-300	6	150	6.17	158.6	60	0.86	1.28	300/91
BLFW-800-045-300	8	200	8.21	211.4	45	1.3	1.94	300/91
BLFW-1000-045-300	10	250	10.24	264.2	45	1.81	2.69	300/91