Fuel Discharge Hose 150 PSI

Smooth-cover fuel transfer hose for farm pumps and gravity-feed storage tanks. ¾″ and 1″, rated 150 PSI working and 450 PSI burst, in 200 ft (61 m) coils.

Application:
Smooth-cover hose for transferring refined fuels from farm pumps and gravity-feed storage tanks. Supplied in 200 ft coils; also available on a reel on request.

Tube:
Black, smooth SBR rubber compound

Reinforcement:
High tensile synthetic textile plies with copper antistatic wire

Cover:
Black, smooth NBR/CPE/SBR


Size range:
¾" – 1" (19 mm – 25 mm)

Working pressure:
150 PSI

Temperature:
−40°F to +180°F (−40°C to +82°C)

Best for:
Refined fuel transfer from farm pumps and gravity-feed storage tanks

Marking:

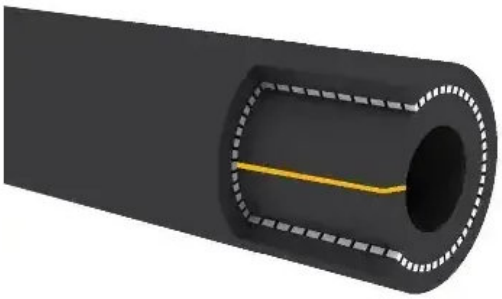

PART NUMBER	ID		OD		WORKING PRESSURE		BURST PRESSURE		WALL		WEIGHT		COIL LENGTH	
	in	mm	in	mm	PSI	bar	PSI	bar	in	mm	lb/ft	kg/m	ft	m
FGH-075-150	¾"	19	1.063	27	150	10	450	31	0.157	4	0.35	0.52	200	61
FGH-100-150	1"	25	1.38	35	150	10	450	31	0.19	4.8	0.48	0.71	200	61