

## HYDRAULIC HOSE

### Hydraulic Hose Exceeds SAE100R16

**Application:**

This hose is designed for hydraulic system and high peak pressures. Meets flame resistance under MSHA standard.

**Tube:**

Oil resistant synthetic rubber.

**Reinforcement:**

Two braids of high tensile steel wire.

**Cover:**


Black, synthetic rubber resistant to oils, abrasion and ozone. Smooth cover.

**Temperature:**

-40°F/+212°F (-40°C /+100°C)

**Marking:**



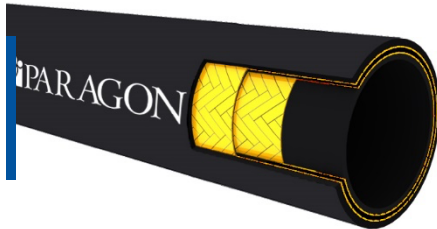

PART NO.	ID		OD		Wire OD	W.P.	B.P.	Min. b. r.	Weight		Max. L
	Inch	mm	Inch	mm	mm	Psi	Psi	Inch	lbs./FT	Kg/m	ft/m
SLR16-04	1/4	6	0.51	13	11.3	5800	23200	1.96	0.17	0.25	200/61
SLR16-05	5/16	8	0.59	15	13.0	5075	20300	2.17	0.22	0.32	200/61
SLR16-06	3/8	10	0.66	17	15.1	4785	19140	2.56	0.26	0.39	200/61
SLR16-08	1/2	13	0.80	20.5	18.4	4250	17000	3.54	0.35	0.52	200/61
SLR16-10	5/8	16	0.94	24	21.9	3650	14600	3.93	0.47	0.70	200/61
SLR16-12	3/4	19	1.10	28	25.8	3200	12800	4.72	0.59	0.88	164/50
SLR16-16	1	25	1.39	35.5	32.8	2400	9600	5.91	0.78	1.16	164/50