EPDM Water Discharge Hose

Rubber water discharge hose for irrigation, dewatering and industrial wastewater — 150 PSI up to 12″; 14″–30″ rated 40 and 30 PSI

Application:
Rubber discharge hose for water and non-corrosive fluids. For irrigation systems, agricultural vehicles, construction dewatering and industrial wastewater.

Tube:
Black smooth EPDM rubber

Reinforcement:
High tensile textile plies

Cover:
Black smooth finish rubber with fabric impression, weather and abrasion resistant


Size range:
2" – 30" (51 mm – 762 mm)

Working pressure:
30–150 PSI by size

Temperature:
−40°F to +176°F (−40°C to +80°C)

Best for:
Irrigation, agricultural vehicles, construction dewatering and industrial wastewater

Marking:
PARAGON

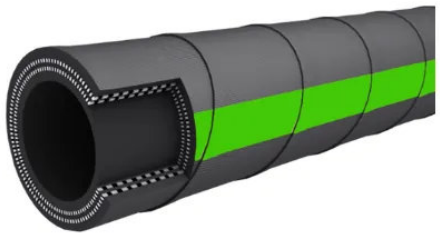





PART NUMBER	ID		OD		WORKING PRESSURE		BURST PRESSURE		WEIGHT		COIL LENGTH	
	in	mm	in	mm	PSI	bar	PSI	bar	lb/ft	kg/m	ft	m
RWDH-200-150	2"	51	2.24	57	150	10	450	31	0.38	0.57	200	61
RWDH-250-150	2½"	64	2.6	66	150	10	450	31	0.44	0.65	200	61
RWDH-300-150	3"	76	3.27	83	150	10	450	31	0.65	0.97	200	61
RWDH-400-150	4"	102	4.33	110	150	10	450	31	1.01	1.5	200	61
RWDH-500-150	5"	127	5.35	136	150	10	450	31	1.43	2.13	200	61
RWDH-600-150	6"	152	6.26	159	150	10	450	31	1.54	2.29	100	30.5
RWDH-800-150	8"	203	8.38	213	150	10	450	31	2.75	4.09	100	30.5
RWDH-1000-150	10"	254	10.39	264	150	10	450	31	3.28	4.88	100	30.5
RWDH-1200-150	12"	305	12.52	318	150	10	450	31	4.61	6.86	100	30.5
RWDH-1400-40	14"	356	14.63	372	40	3	120	8	—	—	33	10.1
RWDH-1600-40	16"	406	16.65	423	40	3	120	8	—	—	33	10.1
RWDH-1800-30	18"	457	18.71	475	30	2	90	6	—	—	33	10.1
RWDH-2000-30	20"	508	20.71	526	30	2	90	6	—	—	33	10.1
RWDH-2400-30	24"	610	24.96	634	30	2	90	6	—	—	20	6.1
RWDH-3000-30	30"	762	31.1	790	30	2	90	6	—	—	20	6.1

To order a cut length, add it in feet to the part number: RWDH-600-150-50′ is a 6″ × 50′ length.

Hose assemblies with Bauer and Camlock couplings are available on request.

14″–30″ sizes are rated 40 PSI (14″, 16″) and 30 PSI (18″–30″) working; weights for these sizes on request.